


OPT 2-JAW HIGH SPEED HOLLOW POWER CHUCKS

二爪高速中空油壓夾頭



尺寸圖 » Dimensions

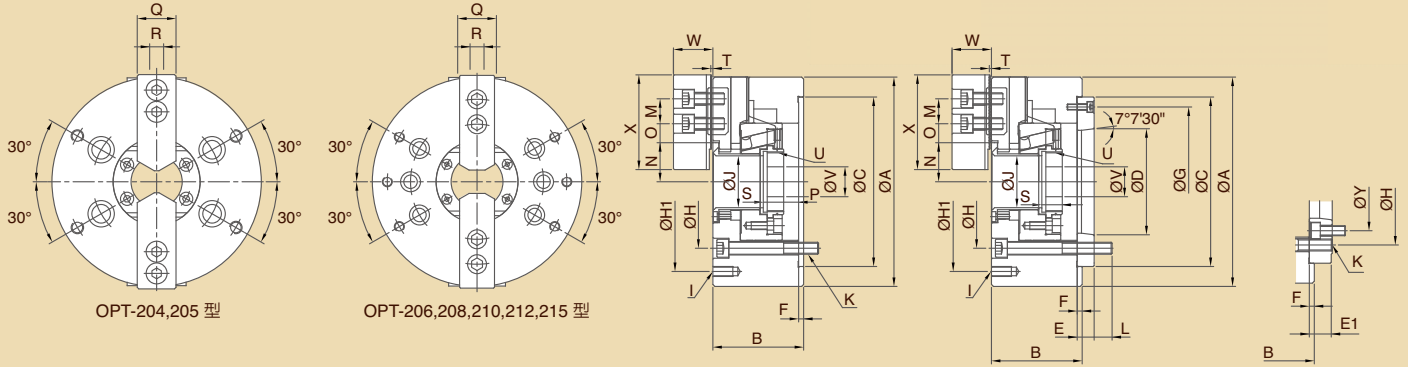

規格表 » Specifications

單位/UNIT:mm

| 型式/規格 MODEL /SPEC. | 主軸鼻端番號 Nose Of Spindle | A | B | C (h6) | D | E | E1 | F | G | H | H1 | I | J | K | L |
|--------------------------|---------------------------------------|-----|-----|-----------|---------|----|----|---|-----|-------|---------|-------------|-------|-------------|----|
| OPT-204 | -- | 110 | 59 | 85 | -- | -- | -- | 4 | -- | 70.6 | -- | -- | 26 | 4-M10x1.5P | -- |
| OPT-205 | A ₂ -4 | 135 | 60 | 110 | 63.513 | 20 | -- | 4 | 96 | 82.6 | PCDø118 | 4-M8x1.25P | 33 | 4-M10x1.5P | 15 |
| OPT-206 | A ₂ -5 | 169 | 81 | 140 | 82.563 | 15 | -- | 5 | 116 | 104.8 | PCDø145 | 6-M10x1.5P | 45 | 6-M10x1.5P | 16 |
| OPT-208 | A ₂ -6(A ₂ -5) | 210 | 91 | 170 | 106.375 | 17 | 23 | 5 | 150 | 133.4 | PCDø180 | 6-M10x1.5P | 52 | 6-M12x1.75P | 18 |
| OPT-210 | A ₂ -8(A ₂ -6) | 254 | 100 | 220 | 139.719 | 18 | 28 | 5 | 190 | 171.4 | PCDø225 | 6-M12x1.75P | 75 | 6-M16x2P | 19 |
| OPT-212 | A ₂ -8 | 304 | 110 | 220 | 139.719 | 18 | -- | 6 | 190 | 171.4 | PCDø250 | 6-M12x1.75P | 91 | 6-M16x2P | 25 |
| OPT-215 | A ₂ -11(A ₂ -8) | 381 | 133 | 300 | 196.869 | 22 | 33 | 6 | 260 | 235 | PCDø324 | 6-M12x1.75P | 117.5 | 6-M20x2.5P | 28 |

| 型式/規格 MODEL /SPEC. | M | N max. | N min. | O max. | O min. | P max. | P min. | Q | R | S | T | U | V | W | X | Y | 通孔直徑 Thru-Hole [Diameter] (mm) | 柱塞行程 Plunger Stroke (mm) |
|--------------------------|----|-----------|-----------|-----------|-----------|-----------|-----------|----|----|------|---|----------|----|------|------|-------|-----------------------------------------|-----------------------------------|
| OPT-204 | 14 | 23 | 20.3 | 11.5 | 6.7 | 3.5 | -6.5 | 23 | 10 | 17.5 | 2 | M32x1.5P | 12 | 24 | 49.5 | -- | 26 | 10 |
| OPT-205 | 14 | 26.2 | 23.5 | 19 | 6 | 1 | -9 | 25 | 10 | 20 | 2 | M40x1.5P | 12 | 31.5 | 62 | -- | 33 | 10 |
| OPT-206 | 20 | 32.35 | 29.6 | 24 | 7 | 11 | -1 | 31 | 12 | 19 | 2 | M55x2P | 20 | 37.5 | 73 | -- | 45 | 12 |
| OPT-208 | 25 | 39.1 | 35.4 | 30 | 10 | 14.5 | -1.5 | 35 | 14 | 20.5 | 2 | M60x2P | 30 | 39.5 | 95 | 104.8 | 52 | 16 |
| OPT-210 | 30 | 51.5 | 47.1 | 34 | 12 | 8.5 | -10.5 | 40 | 16 | 25 | 2 | M85x2P | 40 | 43 | 110 | 133.4 | 75 | 19 |
| OPT-212 | 30 | 61.6 | 56.3 | 46 | 12 | 8 | -15 | 50 | 21 | 28 | 2 | M100x2P | 50 | 51 | 129 | -- | 91 | 23 |
| OPT-215 | 43 | 82.3 | 77 | 46 | 13 | 7.5 | -16 | 62 | 22 | 42.5 | 5 | M130x2P | 48 | 66.5 | 165 | 171.4 | 117.5 | 23 |

| 型式/規格 MODEL /SPEC. | 爪行程 〔直徑〕 Jaw Stroke [Diameter] (mm) | 最高迴轉速 Max.Speed r.p.m.(min ⁻¹) | 最大拉力 Max. Pull Force kgf (KN) | 最大靜夾持力 Max. Gripping Force kgf (KN) | 最大設定 油壓壓力 Max. Hydr. Pressure kgf/cm ² (Mpa) | 淨重 Weight (kg) | 搭配 油壓缸型號 Matching Cylinder | 夾持範圍 Gripping Range |
|--------------------------|-------------------------------------------------|--------------------------------------------------|----------------------------------------|----------------------------------------------|---------------------------------------------------------------------|----------------------|-------------------------------------|---------------------------|
| OPT-204 | 5.4 | 8000 | 920 (9) | 1930 (19) | 15.5 (1.5) | 3.6 | P0928 | ø7~ø110 |
| OPT-205 | 5.4 | 7000 | 1120 (11) | 2340 (23) | 19 (1.9) | 6.5 | P1036 | ø10~ø135 |
| OPT-206 | 5.5 | 6000 | 1420 (14) | 3770 (37) | 18.5 (1.8) | 13.1 | P1246 | ø13~ø169 |
| OPT-208 | 7.4 | 5000 | 2240 (22) | 5710 (56) | 17 (1.7) | 23.0 | P1552 | ø13~ø210 |
| OPT-210 | 8.8 | 4200 | 2850 (28) | 7440 (73) | 18 (1.8) | 35.9 | P1875 | ø30~ø254 |
| OPT-212 | 10.6 | 3300 | 3670 (36) | 9690 (95) | 18 (1.8) | 56.6 | P2091 | ø35~ø304 |
| OPT-215 | 10.6 | 2500 | 4790 (47) | 12130 (119) | 17 (1.7) | 103.2 | P2511 | ø35~ø381 |