


中空動力夾頭

THROUGH-HOLE POWER CHUCK



- 楔形二爪大貫通孔徑，特別適合異形物的夾持。
- 摺動面均經硬化及精密研磨，並直接潤滑。
- 高剛性結構及高夾持精度。
- It's a WEDGE-HOOK type 2-jaw with the large through-hole.
- Matching surfaces of all parts hardened, ground and lubricated direct
- Construction of high rigidity and high clamping accuracy.
- J值為連結螺帽未車製螺牙時的孔徑。Kmax值為連結螺帽可車製螺牙之最大規格，但可依實際需求訂製。
- J value is the hole diameter of blank draw nut, K is the maximum thread specification, and it could be customize.

2H-08A5
2H-10A6
2H-15A8
Refer to Fig.A

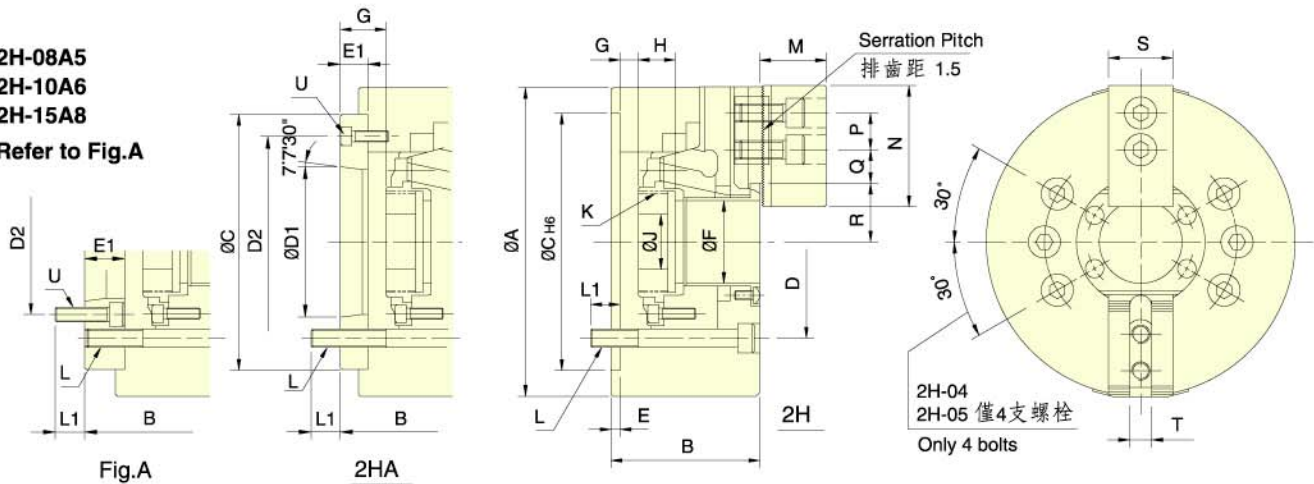

保留規格修改的權利
Subject to technical changes.

註：紅色數據為2H-A型之寸法。

The dimensions and the specifications of 2H-A type are in the red data.

規格 Spec. 型號 Model	楔心行程 mm Plunger stroke	爪行程(直徑)mm Jaw stroke(Dia.)	夾持直徑 Chucking Dia.mm 最大 Max. 最小 Min.	容許油壓拉推力(kN/kgf) Max. D.B. pull	最大夾持力(kN/kgf) Max. clamping force	最高迴轉數 min'(r.p.m) Max. speed	I kg-m ²	重量 kg Weight	適用迴轉缸 Matching cyl.	最大使用壓力 Max. pressure Mpa (kgf/cm ²)
2H-04	10	5.4	110	7	9.2(940)	18.9(1930)	8000	0.01	3.8	1.6(16)
2H-05	A4	10	135	12	11.7(1190)	23.9(2440)	7000	0.02	6.5	7.3
2H-06	A5	12	168	15	14.4(1470)	37.9(3870)	6000	0.06	11.5	13.3
2H-08	A5	16	210	13	23.1(2360)	57.2(5840)	5000	0.17	21.3	24.2
	A6	16	210	13	23.1(2360)	57.2(5840)	5000	0.17	21.3	22.4
2H-10	A6	19	254	31	28.4(2900)	73.9(7540)	4200	0.31	33.5	40.5
	A8	19	254	31	28.4(2900)	73.9(7540)	4200	0.31	33.5	39
2H-12	A8	23	304	34	36.7(3740)	95.8(9780)	3300	0.70	59.7	62.7
2H-15	A8	23	381	50	46.9(4790)	119.6(12200)	2500	2.42	115	129
	A11	23	381	50	46.9(4790)	119.6(12200)	2500	2.34	115	122

寸法 Size 型號 Model	A	B	C	D	D1	D2	E	E1	F	G max.	G min.	H	J
2H-04	110	59	85	70.6	-	-	4	-	26	3.5	-6.5	17.5	12
2H-05	A4	135	60	71	110	82.6	4	15	33	1	16	-9	6
2H-06	A5	168	81	91	140	104.8	4	23	45	11	26	-1	14
2H-08	A5	210	91	109	170	133.4	5	17	52	14.5	37.5	-1.5	21.5
	A6	210	91	103	170	133.4	5	25	52	14.5	31.5	-1.5	15.5
2H-10	A6	254	100	120	220	171.4	5	18	75	8.5	33.5	-10.5	14.5
	A8	254	100	113	220	171.4	5	33	75	8.5	26.5	-10.5	7.5
2H-12	A8	304	110	122	230	171.4	6	33	91	8	26	-15	3
2H-15	A8	381	133	160	300	235	6	22	120	11	44	-12	21
	A11	381	133	149	300	235	6	22	120	11	33	-12	10

寸法 Size 型號 Model	K max.	L	L1	M	N	P	Q max.	Q min.	R max.	R min.	S	T	U
2H-04	M32x1.5	4~M10	16	24	52	14	11.3	6.8	23	20.3	23	10	-
2H-05	A4 M40x1.5	4~M10	15	31	62	14	19.8	7.8	26.5	23.8	25	10	3~M6
2H-06	A5 M55x2	6~M10	16	37	73	20	22.8	9.3	32	29.3	31	12	3~M6
2H-08	A5 M60x2	6~M12	20	38	95	25	29.8	14.8	38.7	35	35	14	6~M10
	A6	6~M12	20	38	95	25	29.8	14.8	38.7	35	35	14	3~M6
2H-10	A6 M85x2	6~M16	22	43	110	30	33.8	14.3	51	46.6	40	16	6~M12
	A8	6~M16	22	43	110	30	33.8	14.3	51	46.6	40	16	3~M8
2H-12	A8 M100x2	6~M16	23	51	130	30	45.8	15.8	61.3	56	50	21	3~M8
2H-15	A8 M130x2	6~M20	30	63	165	43	47.3	18.2	80	74.7	62	25.5 or 22	6~M16
	A11	6~M20	30	63	165	43	47.3	18.2	80	74.7	62	25.5 or 22	3~M10

POWER CHUCK