


中實迴轉油壓缸

ROTATING HYDRAULIC CYLINDER



- 短型, 高速, 輕量型迴轉油壓缸。
- 安裝時可由後端鎖固之。
- For short form, light weight and high speed rotary cylinder.
- Can screw it from the rear end of the cylinder when mounting.
- 洩油孔配管務必單獨接回油壓槽, 以避免產生背壓。
- The drain port should be independently connected to oil tank to avoid back pressure.

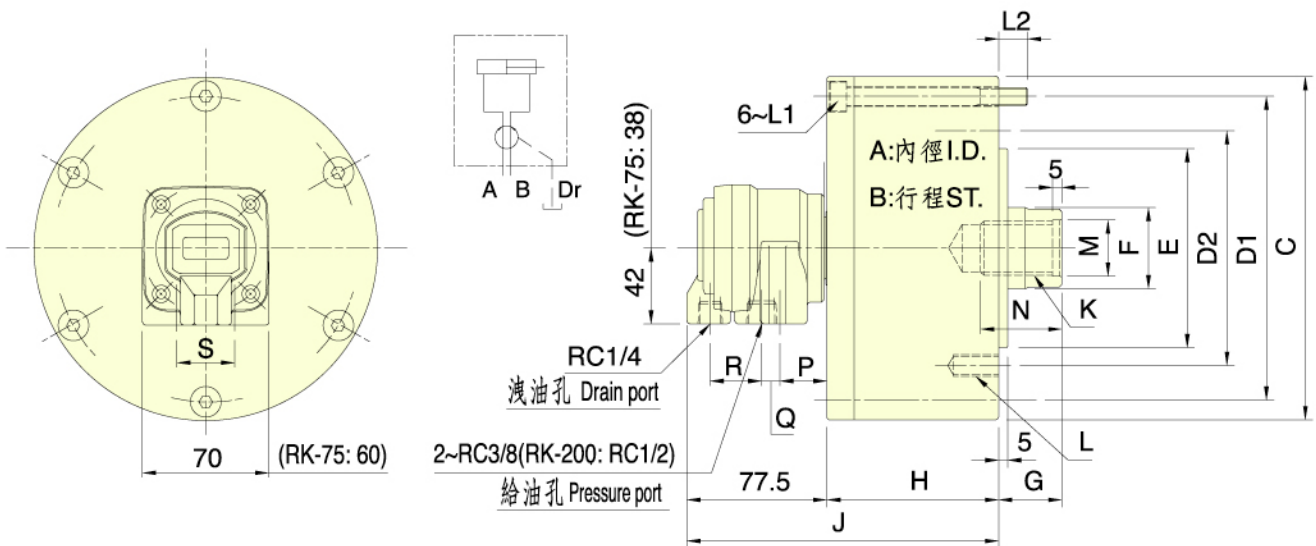

保留規格修改的權利
Subject to technical changes.

規格 Spec. 型號 Model	活塞面積 Eff. piston area cm ²		行程 mm Piston stroke	最高迴轉數 min ⁻¹ (r.p.m) Max. speed	最高使用壓力 MPa ² Max. pressure (kgf/cm ²)	I kg·m ² Moment of inertia	重量 kg Weight
	押側 Extend	拉側 Retract					
RK-75N	44.2	37.1	15	6000	4.0 (40)	0.01	2.8
RK-100N	78.5	71.5	20			0.03	4.3
RK-125N	122.7	113.1	25			0.05	6.8
RK-150N	176.7	160.8	30	5500		0.09	9.4
RK-200N	314.1	290.4	35			0.28	15.3

寸法 Size 型號 Model	A	B	C	D1	D2	E h7	F	G		H	J	K	L	L1	L2	M H8	N	P	Q	R	S
								max.	min.												
RK-75N	75	15	107	90	65			30	57	134		6~M8x16	M8x60			21	35	28		27.5	26
RK-100N	100	20	132	115	100	80	30	45	72	149		6~M10x20	M8x75	12		25		10			
RK-125N	125	25	160	140	130	110	35	50	25	82	159	M24x3.0	6~M12x20	M8x85		45	26		28.5	32	
RK-150N	150	30	190	170			45	55	95	172		M30x3.5	12~M12x24	M10x100	16	32					
RK-200N	200	35	245	220	145	120	55	70	35	115	192	M36x4.0	12~M16x30	M10x125	21	38	60	30	6		28