



3-JAW WEDGE TYPE THROUGH-HOLE
POWER CHUCK (WITH ADAPTOR)

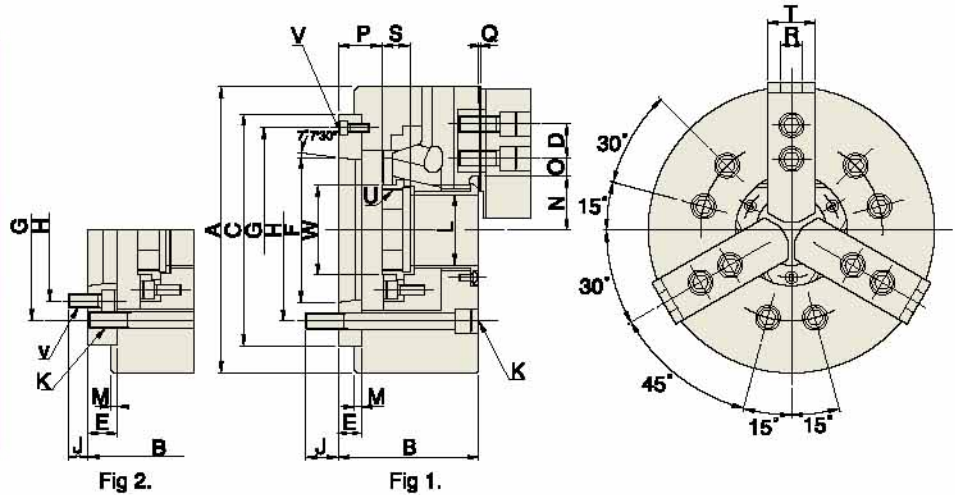

把握力性能曲線 TF3BA

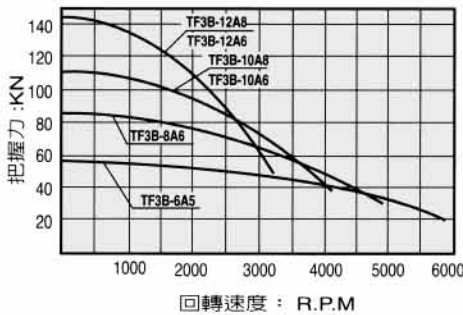

規格 SPECIFICATIONS

型式 Model	TF3B-5A4	TF3B-6A5	TF3B-8A5	TF3B-8A6	TF3B-10A6	TF3B-10A8	TF3B-12A8	TF3B-15A8	TF3B-15A11
尺寸 Dim									
透孔徑 Through-Hole(mm)	33	45	52	52	75	75	91	117.5	117.5
柱塞行程 Plunger Stroke (mm)	10	12	16	16	19	19	23	23	23
爪行程 (直徑) Jaw Stroke (Dia) (mm)	5.4	5.5	7.4	7.4	8.8	8.8	10.6	10.6	10.6
最大拉桿推力 Max. Draw Bar Pull Force(kgf)	1700	2200	3400	3400	4300	4300	5500	7240	7240
最大夾持力/油壓壓力 Max. Gripping Force (kgf)/(kgf/cm ²)	3600 / 29.6	5700 / 28.5	8800 / 28.5	8800 / 28.5	11000 / 27.5	11000 / 27.5	14300 / 27.5	18355 / 23.5	18355 / 23.5
最大速度 Max. Speed(r.p.m)	7000	6000	4900	4900	4200	4200	3300	2500	2500
重量 Weight(kg)	6.9	14.2	25.8	24.05	40.9	37.4	59.5	134	127
適合油壓缸 Matching Cylinder	RC5	RC6	RC8	RC8	RC10	RC10	RC12	RC15	RC15
適合生爪 Matching Soft Jaw	HC05	HC06	HC08	HC08	HC10	HC10	HC12	HC15	HC15
適合硬爪 Maching Hard Jaw	HJ05	HJ06	HJ08	HJ08	HJ10	HJ10	HJ12	HJ15	HJ15

尺寸表 DIMENSIONS:

型式 Model	TF3B-5A4	TF3B-6A5	TF3B-8A5	TF3B-8A6	TF3B-10A6	TF3B-10A8	TF3B-12A8	TF3B-12A8	TF3B-15A8	TF3B-15A11
尺寸 Dim										
A	135	169	210	210	254	254	304	304	381	381
B	71	91	109	103	120	113	129	122	160	149
G(H6)	96	116	133.35	150	171.45	190	190	190	235	260
D	14	20	25	25	30	30	30	30	43	43
E	15	15	22	17	25	18	25	18	33	22
F	63.513	82.563	82.563	106.375	106.375	139.719	106.375	139.719	139.719	196.869
C(H6)	110	140	170	170	220	220	220	220	300	300
H	82.55	104.78	104.78	133.35	133.35	171.45	133.35	171.45	171.45	235
J	15.5	16	13	18	18	24	25	25	24	28
K	3XM10	6XM10	6X12	6XM12	6XM16	6XM16	6XM16	6XM16	6XM20	6XM20
L	33	45	52	52	75	75	91	91	117.5	117.5
M	4	5	5	5	5	5	6	6	6	6
N max.	26.5	32	38.7	38.7	51	51	61.3	61.3	82	82
N min.	23.8	29.25	35	35	46.6	46.6	56	56	76.7	76.7
O max.	19.5	24	30	30	34.5	34.5	46.5	46.5	46.75	46.75
O min.	6	7.5	10.5	10.5	12	12	12	12	13.75	13.75
P max.	16	26	37.5	31.5	33.5	26.5	33	26	40	29
P min.	6	14	21.6	15.5	14.5	7.5	10	3	17	6
Q	2	2	2	2	2	2	2	2	5	5
R	10	12	14	14	16	16	21	21	22	22
S	20	19	20.6	20.6	25	25	28	28	43	43
T	23	32	37	37	42	42	52	52	62	62
U max.	M40X1.5	M55X2.0	M60X2.0	M60X2.0	M85X2.0	M85X2.0	M100X2.0	M100X2.0	M130X2.0	M130X2.0
V	3XM6	3XM6	6XM10	3XM6	6XM12	6XM8	6XM12	6XM8	6XM16	3XM10
W	45	60	66	66	94	94	108	108	139	139
參考圖	Fig 1	Fig 1	Fig 2	Fig 1	Fig 2	Fig 1	Fig 2	Fig 1	Fig 2	Fig 1